

CANNES

SHOWER MIXER AND DIVERTER



Wall plates	Mixer Ø65 mm · diverter Ø40 mm
Valve depth in wall	55–85 mm
Lever	115 mm
Cartridge	Citec ceramic
Body	DZR brass
WaterMark licence	WM-022467

FINISHES AND PRODUCT CODES




Chrome
CAN-C




Matte Black
CAN-MB




Brushed Nickel
CAN-BN



Brushed Gunmetal
CAN-GM



Antique Brass
CAN-AB



Brushed Brass
CAN-BB

WATER EFFICIENCY


This mixer has no outlet of its own, so it carries no WELS rating. The rating belongs to the outlets it supplies.

CERTIFICATION

WaterMark WM-022467

Dimensions

All dimensions in millimetres. Drawn from the manufacturer's production drawing.

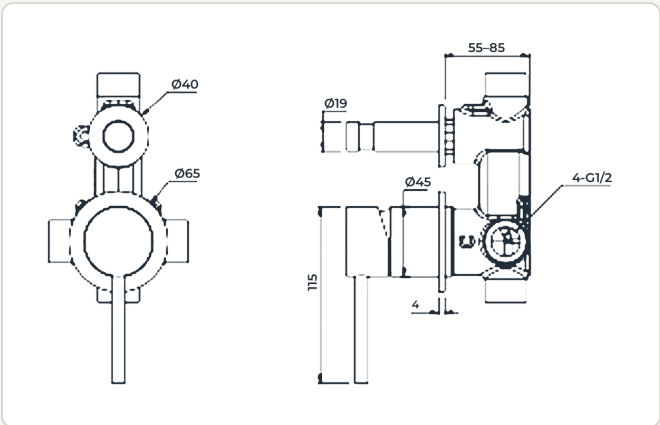

INSTALLATION DATA	
Mounting	In-wall valve with diverter
Valve connections	4 × ½" BSP (hot, cold and two outlets)
Wall box	150 × 100 mm
Mixer to diverter	68 mm, centre to centre
Wall holes	Ø50 mm (mixer) · Ø25 mm (diverter)
Finished depth	55–85 mm
Working pressure	50–800 kPa (factory rating)
Water temperature	5–80 °C
Installation	Licensed plumber, to the NZ Building Code (G12)

WARRANTY	
Tap body	15 years
Cartridges, valves & aerators	7 years
Surface finish	3 years
Washers & O-rings	2 years

Parts warranty for home use, original purchaser and installation, proof of purchase required. Full terms at invoguemirrors.co.nz/pages/warranty. In addition to your rights under the Consumer Guarantees Act 1993.

BEFORE YOU INSTALL

Installation must be carried out by a licensed plumber, to the NZ Building Code (G12). Set the valve depth before the wall is lined. The installation guide for this product is on the product page.

invoguemirrors.co.nz · info@invoguemirrors.co.nz