


# COMO

KITCHEN MIXER



|                       |                                                                             |
|-----------------------|-----------------------------------------------------------------------------|
| WELS rating           | 5 Star · 6.0 L/min                                                          |
| WELS registration     | T28127                                                                      |
| WaterMark licence     | WM-022467                                                                   |
| Lead free             | ≤0.25% lead · Lead Free WaterMark (AU)<br>WM-022467 · supports NZBC G12/AS1 |
| Spout reach           | 220 mm                                                                      |
| Clearance under spout | 190 mm                                                                      |
| Overall height        | 340 mm                                                                      |
| Spout                 | Swivels 360°                                                                |
| Tap hole              | Ø35 mm                                                                      |
| Body / base diameter  | Ø45 mm / Ø55 mm                                                             |
| Body                  | DZR brass                                                                   |
| Cartridge             | Citec ceramic                                                               |

FINISHES AND PRODUCT CODES

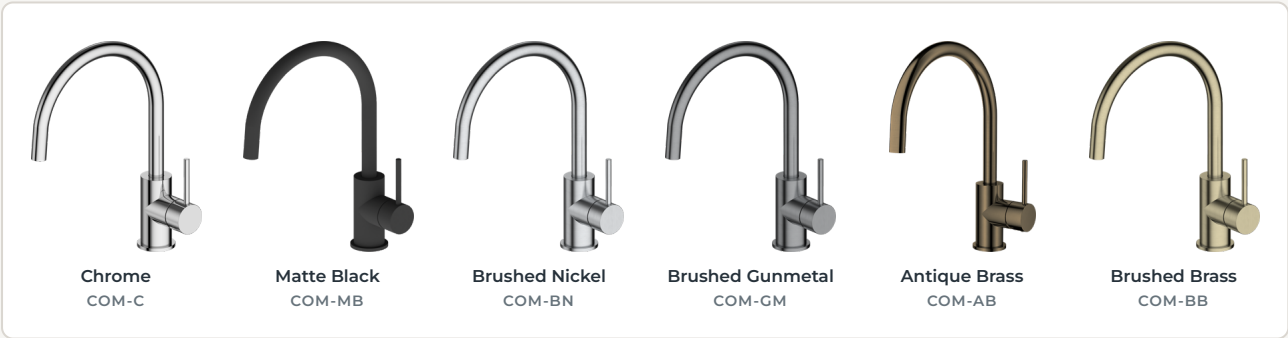

WATER EFFICIENCY


**WELS 5 Star · 6.0 L/min**  
Registration T28127

CERTIFICATION

**WaterMark WM-022467**

# Dimensions

All dimensions in millimetres. Drawn from the manufacturer's production drawing.

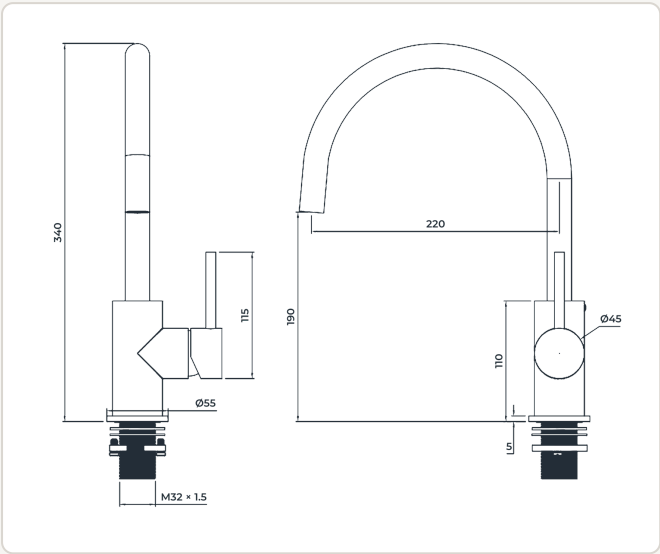

INSTALLATION DATA

|                   |                                                 |
|-------------------|-------------------------------------------------|
| Mounting          | Single hole, bench or sink                      |
| Tap hole          | Ø35 mm                                          |
| Shank thread      | M32 × 1.5                                       |
| Water connection  | ½" BSP flexible hoses to isolation valves       |
| Hoses             | Red = hot (left) · Blue = cold (right)          |
| Working pressure  | 50–800 kPa (factory rating)                     |
| Water temperature | 5–80 °C                                         |
| Installation      | Licensed plumber, to the NZ Building Code (G12) |

WARRANTY

|                               |          |
|-------------------------------|----------|
| Tap body                      | 15 years |
| Cartridges, valves & aerators | 7 years  |
| Surface finish                | 3 years  |
| Washers & O-rings             | 2 years  |

Parts warranty for home use, original purchaser and installation, proof of purchase required. Full terms at [invoguemirrors.co.nz/pages/tapware-warranty](http://invoguemirrors.co.nz/pages/tapware-warranty). In addition to your rights under the Consumer Guarantees Act 1993.

BEFORE YOU INSTALL

Installation must be carried out by a licensed plumber, to the NZ Building Code (G12). If your supply is above 500 kPa, fit a pressure-limiting valve. The installation guide for this product is on the product page.

[invoguemirrors.co.nz](http://invoguemirrors.co.nz) · [info@invoguemirrors.co.nz](mailto:info@invoguemirrors.co.nz)