SPECIFICATION SHEET

MILANO

WALL SPOUT AND MIXER

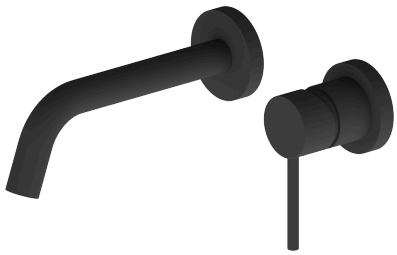

WELS rating	5 Star · 6.0 L/min
WELS licence	1497
Wall plates	Ø65 mm
Valve depth in wall	45–70 mm
Spout projection	192 mm
Spout centre to mixer centre	120 mm
Cartridge	Citec ceramic
Body	DZR brass
WaterMark licence	WM-022467 · AS 3718

FINISHES AND PRODUCT CODES

Chrome	Matte Black	Brushed Nickel	Brushed Gunmetal	Antique Brass	Brushed Brass
MIL-WSM-C	MIL-WSM-MB	MIL-WSM-BN	MIL-WSM-GM	MIL-WSM-AB	MIL-WSM-BB

WATER EFFICIENCY

WELS 5 Star · 6.0 L/min

As shown on the product label

CERTIFICATION

WaterMark WM-022467

Certified to AS 3718

Dimensions

All dimensions in millimetres. Drawn from the manufacturer's production drawing.

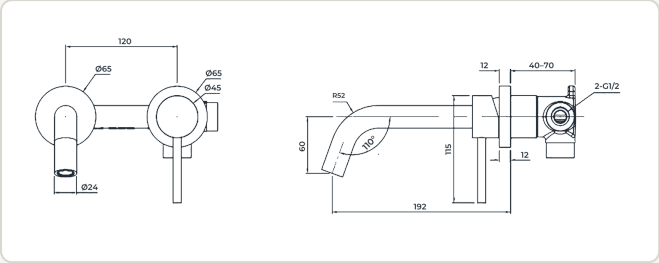

INSTALLATION DATA

Mounting	In-wall valve with separate spout
Valve connections	2 × ½" BSP (hot and cold)
Wall box	190 × 80 mm
Wall holes	Ø25 mm (spout) · Ø45 mm (mixer)
Finished depth	45–70 mm
Working pressure	50–800 kPa (factory rating)
Water temperature	5–80 °C
Installation	Licensed plumber, to the NZ Building Code (G12)

WARRANTY

Tap body	15 years
Cartridges, valves & aerators	7 years
Surface finish	3 years
Washers & O-rings	2 years

Parts warranty for home use, original purchaser and installation, proof of purchase required. Full terms at invoguemirrors.co.nz/pages/warranty. In addition to your rights under the Consumer Guarantees Act 1993.

BEFORE YOU INSTALL

Installation must be carried out by a licensed plumber, to the NZ Building Code (G12). Set the valve depth before the wall is lined. The installation guide for this product is on the product page.

invoguemirrors.co.nz · info@invoguemirrors.co.nz