

VIENNA

SHORT BASIN MIXER



WELS rating	5 Star · 6.0 L/min
WELS registration	T29238
WaterMark licence	WM-022467 · AS 3718
Overall height	175 mm
Spout reach	140 mm
Clearance under spout	75 mm
Tap hole	Ø35–38 mm
Base diameter	Ø55 mm
Body	DZR brass
Cartridge	Citec ceramic

FINISHES AND PRODUCT CODES



Chrome
VIE-S-C




Matte Black
VIE-S-MB



Brushed Nickel
VIE-S-BN



Brushed Gunmetal
VIE-S-GM



Antique Brass
VIE-S-AB




Brushed Brass
VIE-S-BB

WATER EFFICIENCY
WELS 5 Star · 6.0 L/min
Registration T29238

CERTIFICATION
WaterMark WM-022467
Certified to AS 3718

Dimensions

All dimensions in millimetres. Drawn from the manufacturer's production drawing.

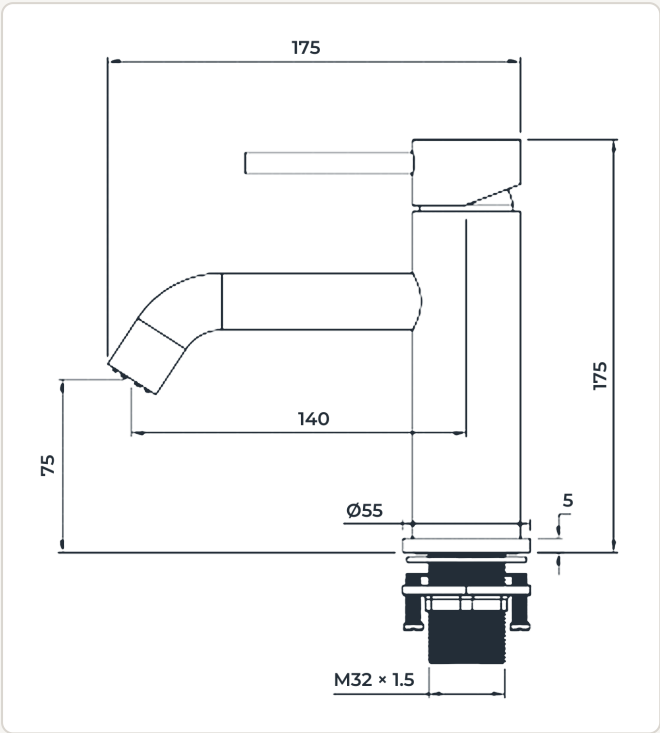

INSTALLATION DATA	
Mounting	Single hole, basin or bench
Tap hole	Ø35–38 mm
Shank thread	M32 × 1.5
Water connection	½" BSP flexible hoses to isolation valves
Hoses	Red = hot (left) · Blue = cold (right)
Working pressure	50–800 kPa (factory rating)
Water temperature	5–80 °C
Installation	Licensed plumber, to the NZ Building Code (G12)

WARRANTY	
Tap body	15 years
Cartridges, valves & aerators	7 years
Surface finish	3 years
Washers & O-rings	2 years

Parts warranty for home use, original purchaser and installation, proof of purchase required. Full terms at invoguemirrors.co.nz/pages/warranty. In addition to your rights under the Consumer Guarantees Act 1993.

BEFORE YOU INSTALL

Installation must be carried out by a licensed plumber, to the NZ Building Code (G12). If your supply is above 500 kPa, fit a pressure-limiting valve. The installation guide for this product is on the product page.

invoguemirrors.co.nz · info@invoguemirrors.co.nz