

MILANO

WALL MIXER



Wall plate	Ø65 mm
Valve depth in wall	45–70 mm
Lever	115 mm
Cartridge	Citec ceramic
Body	DZR brass
WaterMark licence	WM-022467 · AS 3718

FINISHES AND PRODUCT CODES



Chrome
MIL-WM-C



Matte Black
MIL-WM-MB



Brushed Nickel
MIL-WM-BN



Brushed Gunmetal
MIL-WM-GM



Antique Brass
MIL-WM-AB



Brushed Brass
MIL-WM-BB

WATER EFFICIENCY


This mixer has no outlet of its own, so it carries no WELS rating. The rating belongs to the outlet it supplies.

CERTIFICATION

WaterMark WM-022467
Certified to AS 3718

Dimensions

All dimensions in millimetres. Drawn from the manufacturer's production drawing.

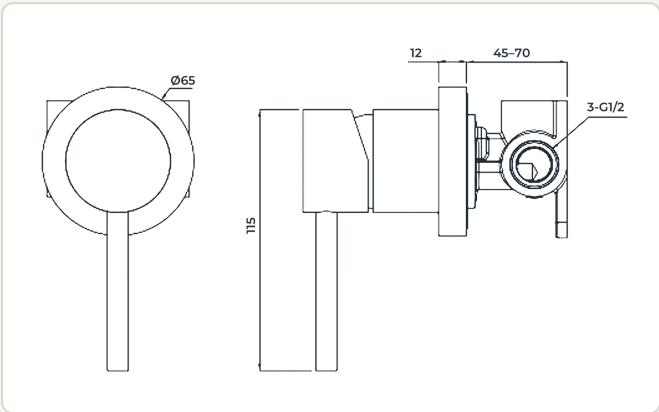

INSTALLATION DATA	
Mounting	In-wall valve
Valve connections	3 × ½" BSP (hot, cold and outlet)
Wall recess	80 × 80 mm
Wall hole	Ø50 mm
Finished depth	45-70 mm
Working pressure	50-800 kPa (factory rating)
Water temperature	5-80 °C
Installation	Licensed plumber, to the NZ Building Code (G12)

WARRANTY	
Tap body	15 years
Cartridges, valves & aerators	7 years
Surface finish	3 years
Washers & O-rings	2 years

Parts warranty for home use, original purchaser and installation, proof of purchase required. Full terms at invoguemirrors.co.nz/pages/warranty. In addition to your rights under the Consumer Guarantees Act 1993.

BEFORE YOU INSTALL

Installation must be carried out by a licensed plumber, to the NZ Building Code (G12). Set the valve depth before the wall is lined. The installation guide for this product is on the product page.

invoguemirrors.co.nz · info@invoguemirrors.co.nz